




# INTERIOR-FLEX

ELASTOMERIC EMULSION PAINT



**A NEW TYPE OF MATT PAINT  
FOR INTERIOR CEILINGS AND WALLS**

- SMOOTH MATT FINISH
- FINE CRACK BRIDGING
- EXCELLENT COVERAGE
- FLEXIBLE, MICROPOROUS, BREATHABLE
- WIPEABLE WHEN DRY
- BRUSH, ROLLER OR SPRAY APPLICATION

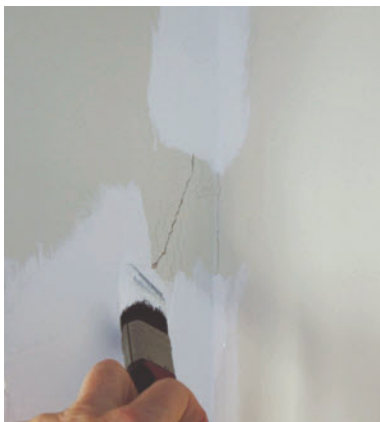

## 1. PREPARATION

Prepare and fill large cracks.  
Brush **INTERIOR-FLEX** into  
hairline cracks and allow to dry.



## 2. FINISH

Brush, roll or spray **INTERIOR-FLEX**  
over the prepared ceilings and walls.



**• EASY APPLICATION • QUICK DRYING • LOW ODOUR**

**COLOUR AVAILABILITY:**

(Other colours available on request)

BRILLIANT WHITE

MAGNOLIA

For technical reasons connected with colour reproduction and paint manufacture, these patterns may not exactly match the paint colours.

*Innovators in Water-based Technology*

T: 01279 876 657

E: [info@bedec.co.uk](mailto:info@bedec.co.uk)

[www.bedec.co.uk](http://www.bedec.co.uk)



# INTERIOR-FLEX

**BEDEC Interior-Flex** is an elastomeric matt emulsion paint formulated to coat interior ceilings and walls. Interior-Flex is a unique product designed to bridge hairline cracks and flex with the substrate where movement causes cracking with conventional matt emulsion.

## **Directions for use:**

Stir thoroughly, check colour before use. Apply by brush roller or spray. Do not apply at temperatures below 8°C Centigrade. Ensure all surfaces are free from oil, grease, dirt, dust and loose particles. On existing painted surfaces remove all loose and flaking paint and rub down with abrasive paper where necessary.

Areas affected by mould should be treated with a suitable fungicidal wash.

On plasterboard or any porous substrate the first coat should be thinned with approximately 30% clean water.

After preparation, brush neat Interior-Flex into hairline cracks and allow to dry. Then apply one or two full coats over the whole area as required. Larger cracks or voids will need filling with a flexible filler.

## **Coverage:**

5 litres will cover approximately 50 sq metres per coat depending upon substrate texture, porosity and application method.

## **Drying:**

Touch dry 2 hours, recoatable after 4 hours at 18°C relative humidity.

## **Flash Point:**

Not applicable - water based.

## **Clean up:**

Clean tools and equipment with water immediately after use.

## **Wise Precautions:**

Ensure good ventilation during application and drying.

Avoid contact with skin and eyes

When applying it is advisable to wear eye protection.

In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.

After contact with skin, wash off immediately with soap and water or a recognised skin cleanser.

Do not use solvent or white spirit.

Keep out of reach of children.

In case of insufficient ventilation during spraying wear suitable respiratory equipment.

Do not empty into drains or watercourses. Some local authorities have special facilities for disposing of waste paint.

Avoid the inhalation of dust. Wear suitable face mask if dry sanding.

Special precautions should be taken during surface preparation of pre 1960s paint surfaces over wood and metal as they may contain harmful lead.

**Pack sizes:** 2.5 litre 5 litre

**Storage:** Keep out of reach of children. Protect from frost. Do not store at low temperatures or by hanging on a hook.

**Colour Range:** See over for colours. Other colours can be manufactured, subject to economical batch sizes.

VOC: EU limit for this product (catA/a): 75g/l (2007) / 30g/l (2010). This product contains max. 30g/l VOC

BEDEC PRODUCTS LIMITED  
Units 1 & 2 Poplars Farm  
Aythorpe Roding, Dunmow, Essex  
CM6 1RY



Tel: 01279876657  
Fax: 01279 876008

www.bedec.co.uk  
Email: info@bedec.co.uk